

COMPATIBLE with 0029

| STANDARD DYNAMIC TIBASE® | | | | | | | | | | | | | | | |
|--------------------------|-----------------|----------------|----------------|-----------------|-----|----------------|-----------------|-----------------|----|-----------------|----------------|-----------------|---|----------------|----------------|
| GINGIVAL HEIGHT | | α _s | α _c | GINGIVAL HEIGHT | | α _s | α _c | GINGIVAL HEIGHT | | α _s | α _c | GINGIVAL HEIGHT | | α _s | α _c |
| 1,2 mm | | | | 2 mm | | | | 3 mm | | | | 4 mm | | | |
| R | 31.322.029.01-2 | 30° | 23° | 31.322.029.02-2 | 25° | 15° | 31.322.029.03-2 | 20 | 25 | 31.322.029.04-2 | 15° | 25° | - | - | - |
| NR | 31.312.029.01-2 | | | 31.312.029.02-2 | | | 31.312.029.03-2 | | | 31.312.029.04-2 | | | - | | |

| DYNAMIC 3TIBASE® | | | | |
|------------------|-----------------|----------------|----------------|----------------|
| GINGIVAL HEIGHT | | α _s | α _s | α _s |
| 2 mm | | CH=5mm | CH= 7mm | CH= 9mm |
| R | - | 25° | 20° | 15° |
| NR | 31.312.029.22-2 | | | |

| DYNAMIC μSCANBODY (LAB/CLIN) | | | | DIGITAL ANALOG | DYNAMIC PRE-MILLED | | DYNAMIC MILLING TOOL | | | SCANALOG |
|------------------------------|--------------|-----------------|------------------------|-------------------|--------------------|-----------------|-------------------------|-------|-----------------|-----------------|
| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG | COBALT- CHROME | α _{dp} | DYNAMIC MILLING TOOL | SHANK | α _{di} | |
| 52.410.103.01-2 | 10 | 50.312.029.01-2 | 43.621.410.01-2 | 34.613.029.01-2 | - | - | 33.345.804.01-2 | 3 | 20° | 23.412.029.01-2 |
| | | 50.312.029.03-2 | 43.624.410.01-2 | | | | 33.445.804.01-2 | 4 | | |
| 52.412.103.01-2 | 12 | (IG=3mm) | 43.630.410.01-2 | | | | 33.645.804.01-2 | 6 | | |

| DYNAMIC SCREWS | | | | STRAIGHT SCREWS | | ANALOG | |
|-----------------|--------------------|---------------------|-------------------------|-----------------|-----------------------|--------------|-----------------|
| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) | STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 | LAB SCANBODY | |
| 41.316.094.01-2 | 41.316.132.01-2 | 43.618.201.01-2 | 18 | 40.316.003.02-2 | 43.601.103.02-2 | - | 30.412.001.01-2 |
| | | 43.624.201.01-2 | 24 | | | | |
| | | 43.632.201.01-2 | 32 | | | | |


LIBRARY CODES

| STANDARD LIBRARY | | CAPTIVE SCREW LIBRARY | |
|------------------------------|---------------------------------|------------------------------|-------------------------------------|
| LAB SCANBODY | DAS_E_0029 | LAB SCANBODY | DAS_C_E_0029 |
| DYNAMIC μSCANBODY (LAB/CLIN) | DAS_I_10_0029 DAS_IG_10_0029 | DYNAMIC μSCANBODY (LAB/CLIN) | DAS_C_I_10_0029 DAS_C_IG_10_0029 |
| | DAS_I_12_0029 DAS_IG_12_0029 | | DAS_C_I_12_0029 DAS_C_IG_12_0029 |
| SCANALOG | DAS_SA_0029 | SCANALOG | DAS_C_SA_0029 |

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)

α_s = Standard maximum angulation
α_c = Captive maximum angulation
α_{di} = Direct to implant maximum angulation
α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

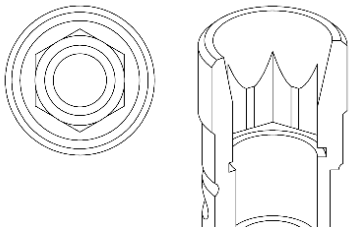

COMPATIBLE with 0030

| STANDARD DYNAMIC TIBASE® | | | | | | | | | | | | | | | |
|--------------------------|-----------------|----------------|----------------|-----------------|-----|----------------|-----------------|-----------------|-----|-----------------|----------------|-----------------|---|----------------|----------------|
| GINGIVAL HEIGHT | | α _s | α _c | GINGIVAL HEIGHT | | α _s | α _c | GINGIVAL HEIGHT | | α _s | α _c | GINGIVAL HEIGHT | | α _s | α _c |
| 1,1 mm | | | | 2 mm | | | | 3 mm | | | | 4 mm | | | |
| R | 31.323.030.01-2 | 42° | 25° | 31.323.030.02-2 | 25° | 15° | 31.323.030.03-2 | 20° | 30° | 31.323.030.04-2 | 15° | 30° | - | - | - |
| NR | 31.313.030.01-2 | | | 31.313.030.02-2 | | | 31.313.030.03-2 | | | 31.313.030.04-2 | | | - | | |

| DYNAMIC 3TIBASE® | | | | |
|------------------|-----------------|----------------|----------------|----------------|
| GINGIVAL HEIGHT | | α _s | α _s | α _s |
| 1,1 mm | | CH=5mm | CH= 7mm | CH= 9mm |
| R | 31.323.030.21-2 | 25° | 20° | 10° |
| NR | 31.313.030.21-2 | | | |

| DYNAMIC μSCANBODY (LAB/CLIN) | | | | DIGITAL ANALOG | DYNAMIC PRE-MILLED | | DYNAMIC MILLING TOOL | | | SCANALOG |
|------------------------------|--------------|--|------------------------|-------------------|--------------------|--|----------------------|-------------------------|-------|-----------------|
| SCANBODY | HEIGHT mm | ADAPTOR | SCREWDRIVER ADAPTOR | DIGITAL ANALOG | COBALT- CHROME | | α _{dp} | DYNAMIC MILLING TOOL | SHANK | α _{di} |
| 52.408.101.01-2 | 8 | 50.313.030.01-2 50.313.030.03-2 (IG=3mm) | 43.621.410.01-2 | 34.613.030.01-2 | 32.213.030.02-2 | | 25° | 33.345.808.01-2 | 3 | 30° |
| 52.410.101.01-2 | 10 | | 43.624.410.01-2 | | | | | 33.445.808.01-2 | 4 | |
| 52.412.101.01-2 | 12 | | 43.630.410.01-2 | | | | | 33.645.808.01-2 | 6 | |
| | | | | | | | | | | 23.413.030.01-2 |

| DYNAMIC SCREWS | | | | STRAIGHT SCREWS | | ANALOG | |
|-----------------|--------------------|---------------------|-------------------------|-----------------|-----------------------|--------------|-----------------|
| DYNAMIC SCREW | HIGH DYNAMIC SCREW | DYNAMIC SCREWDRIVER | SCREWDRIVER LENGTH (mm) | STRAIGHT SCREW | SCREWDRIVER Hex. 1.20 | LAB SCANBODY | |
| 41.320.079.01-2 | 41.320.125.01-2 | 43.618.201.01-2 | 18 | 40.320.003.04-2 | 43.601.103.02-2 | - | 30.413.002.01-2 |
| | | 43.624.201.01-2 | 24 | | | | |
| | | 43.632.201.01-2 | 32 | | | | |

LIBRARY CODES

| STANDARD LIBRARY | | CAPTIVE SCREW LIBRARY | |
|------------------------------|---------------------------------|------------------------------|-------------------------------------|
| LAB SCANBODY | DAS_E_0030 | LAB SCANBODY | DAS_C_E_0030 |
| DYNAMIC μSCANBODY (LAB/CLIN) | DAS_I_8_0030 DAS_IG_8_0030 | DYNAMIC μSCANBODY (LAB/CLIN) | DAS_C_I_8_0030 DAS_C_IG_8_0030 |
| | DAS_I_10_0030 DAS_IG_10_0030 | | DAS_C_I_10_0030 DAS_C_IG_10_0030 |
| | DAS_I_12_0030 DAS_IG_12_0030 | | DAS_C_I_12_0030 DAS_C_IG_12_0030 |
| | | | |
| | | | |
| SCANALOG | DAS_SA_0030 | SCANALOG | DAS_C_SA_0030 |

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)

α_s = Standard maximum angulation
α_c = Captive maximum angulation
α_{di} = Direct to implant maximum angulation
α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

